




<b>Characteristics</b>	Environmental protection IP67 (sealed) Faston, PCB or 2,8 mm solder terminals Pre-wired option
<b>Electrical ratings</b>	250VAC, max. 5A
<b>Range of temperature</b>	-40°C to +85°C
<b>Circuit</b>	CO, NC, NO
<b>Contact material</b>	Silver
<b>Mechanical life</b>	Min. 3x10 <sup>6</sup> cycles (impact free actuation)
<b>Dimensions</b>	20 x 10,3 x 6,4mm
<b>Actuator</b>	Plunger, lever, QA4
<b>Approvals</b>	UL, CSA, ENEC

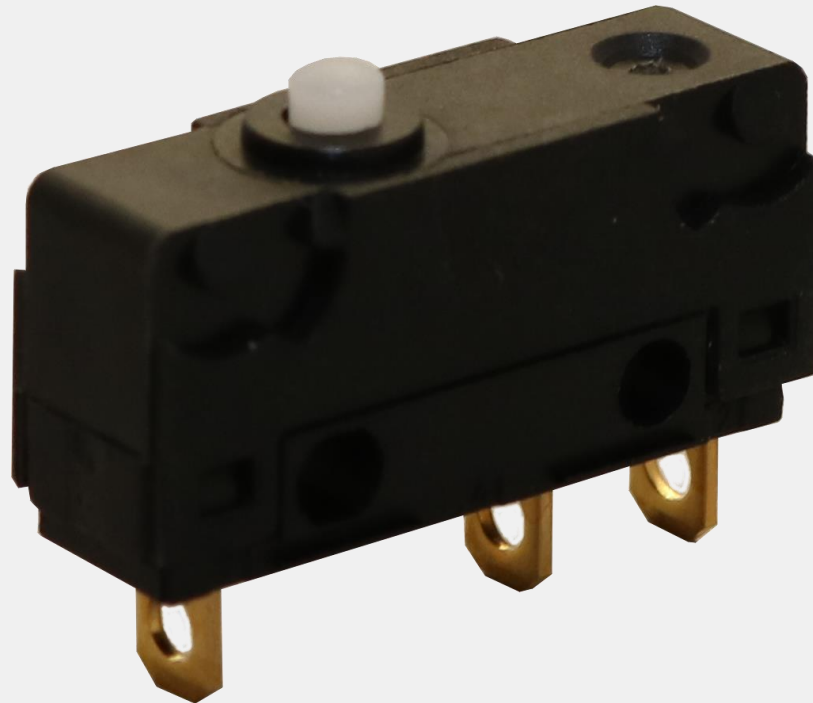

<b>Characteristics</b>	Environmental protection IP67 (sealed) Solder-, faston- or PCB-terminals Pre-wired option
<b>Electrical ratings</b>	250VAC, max. 5A
<b>Range of temperature</b>	-40°C to +85°C (120°C optional)
<b>Circuit</b>	OC, NC, NO
<b>Contact material</b>	Silver, gold plate on silver, gold alloy on silver palladium
<b>Mechanical life</b>	Min. 3x10 <sup>6</sup> cycles (impact free actuation)
<b>Dimensions</b>	20 x 10,3 x 6,4mm
<b>Actuator</b>	Plunger, lever, QA4
<b>Approvals</b>	Automotive Standard